

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/012279 A2

(51) International Patent Classification⁷: **H01L 41/00**
(21) International Application Number:
PCT/IL2003/000603

(22) International Filing Date: 23 July 2003 (23.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/206,717 25 July 2002 (25.07.2002) US

(71) Applicant (for all designated States except US):
NANOMOTION LTD. [IL/IL]; P.O. Box 223, 20692
Yokneam (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): GANOR, Ze'ev
[IL/IL]; 13 Ben Shalom Street, 46408 Herzelia (IL).


(74) Agents: FENSTER, Paul et al.; Fenster & Company,
Intellectual Property 2002 Ltd., P.O. Box 10256, 49002
Petach Tikva (IL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HIGH RESOLUTION PIEZOELECTRIC MOTOR

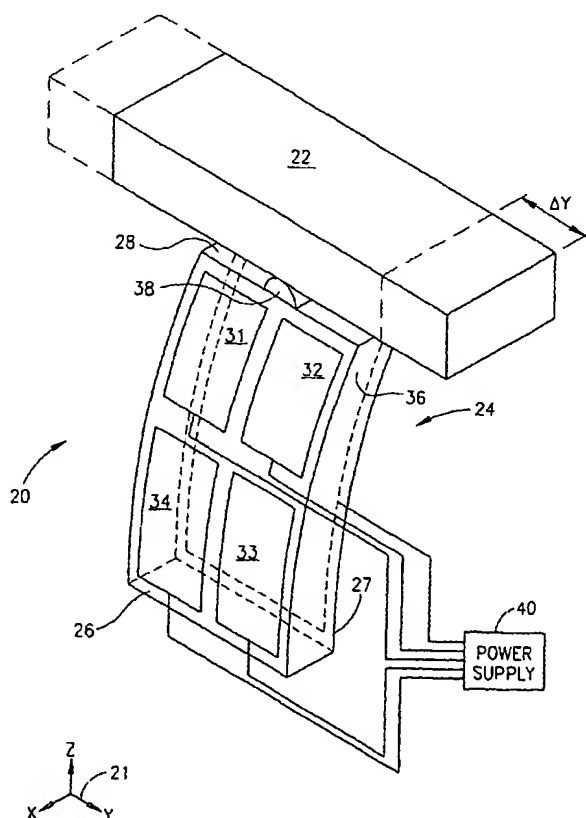

(57) Abstract: A piezoelectric motor for moving and positioning a load, the motor comprising: a piezoelectric vibrator having a plurality of electrodes and a coupling surface which is pressed to a load; and a power supply selectively operable to electrify at least one vibrator electrode with time varying voltage to generate vibrations in the coupling surface that step the load to a desired position or to electrify at least one vibrator electrode with DC voltage to displace the coupling surface and move thereby the load to a desired position, which DC voltage the power supply maintains to maintain the load at the desired position.

WO 2004/012279 A2



Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HIGH RESOLUTION PIEZOELECTRIC MOTOR**FIELD OF THE INVENTION**

The invention relates to piezoelectric motors and in particular to piezoelectric motors capable of moving an element and positioning the element at a desired location with a high
5 degree of accuracy.

BACKGROUND OF THE INVENTION

Piezoelectric motors that are able to move a load from a first position to a second position relatively rapidly, even when moving the element requires translating and/or rotating the load by a relatively large distance and/or angle, are known in the art. Generally, such a
10 piezoelectric motor comprises a piezoelectric vibrator having electrodes on surfaces thereon and a power supply that electrifies the electrodes with an AC voltage to generate high frequency elliptical vibrations in the vibrator. The vibrator has a coupling surface, often a "friction nub" formed from a relatively hard, wear resistant material mounted to a surface of the vibrator, which is resiliently pressed to a surface of a load that the motor moves.

15 To move the load, the power supply electrifies the electrodes to excite vibrations in the vibrator and as a result vibrations in the coupling surface. During each vibration cycle of the vibrator, vibratory motion of the coupling surface steps the load by a relatively small distance in a desired direction towards the second position. As a result of the high frequency of the vibrations, the motor moves the load by a large number of steps each second and thereby at a
20 relatively high velocity.

However, there is often a need for such motors to be able to position a load that they move to an accuracy that is better than a small number of nanometers and controlling such motors to provide the required positioning accuracy is generally difficult. In addition, once a piezoelectric motor has positioned a load it is often required to reposition the load by moving
25 it by accurately controlled nanometer distances equal to or less than a few nanometers or tens of nanometers or sub-nanometer distances. Controlling a piezoelectric motor to provide such performance is also generally difficult.

US Patent 5,616,980, the disclosure of which is incorporated herein by reference, describes electrifying electrodes of a piezoelectric motor with unipolar pulses to control the
30 motor to accurately position a load at a desired location. US Application 09/980,375, the disclosure of which is incorporated herein by reference, describes controlling the step size of a piezoelectric motor by controlling motion of the motor's coupling surface perpendicular to the

load independently of motion of the coupling surface parallel to the load to accurately position the load.

SUMMARY OF THE INVENTION

5 An aspect of some embodiments of the present invention relates to providing a high spatial resolution piezoelectric motor that can position a body to which it is coupled with nanometer or sub-nanometer spatial resolution.

10 An aspect of some embodiments of the present invention relates to providing a high spatial resolution piezoelectric motor that can move a load to which it is coupled relatively rapidly over relatively large distances to position the element at a desired location with nanometer or sub-nanometer spatial resolution.

15 A piezoelectric motor, in accordance with the present invention, comprises a piezoelectric vibrator, a power supply for electrifying electrodes of the vibrator with AC voltage and a power supply for electrifying vibrator electrodes with DC voltage. The motor, in accordance with an embodiment of the present invention, has at least one AC mode of operation and at least one DC mode of operation.

20 In an AC mode, in accordance with an embodiment of the present invention, the power supply electrifies electrodes of the vibrator with a time varying, optionally AC voltage to generate vibrations in a coupling surface of the vibrator that is pressed to a load whose motion the motor controls. The vibrations in the coupling surface step the load to a desired location and may be used to move the load at relatively high velocities and/or over relatively long distances.

25 In a DC mode, the power supply electrifies electrodes of the vibrator with DC voltage to displace the load from a first position by a distance controlled to relatively high resolution to position the load at a second position. The DC voltage distorts the shape of the vibrator, *e.g.* bends or elongates the vibrator. As the vibrator is distorted, the coupling surface moves and "drags" the load to which it is pressed along with it. A direction of the distortion and its magnitude is a function of polarity and magnitude of the DC voltage, which are controlled to displace the load by a displacement required to position the load at the second position. Once
30 in position at the second position, in accordance with an embodiment of the present invention, the power supply maintains the DC voltage on the electrodes as long as required to maintain the vibrator distortion and thereby the load in the second position.

The inventor has found that DC voltage in a DC mode of a piezoelectric motor, in accordance with an embodiment of the present invention, can be controlled to control distance by which the coupling surface of the motor moves with a resolution equal to or better than a few nanometers. As a result, an amount by which a load is displaced from a first position to a second position, in accordance with an embodiment of the present invention, is also controlled to resolution equal to or better than a few a nanometers. In some embodiments of the present invention the amount by which the load is displaced is controlled to sub-nanometer resolution. In some embodiments of the present invention, for which appropriate controls are implemented to reduce environmental disturbances, such as for example vibrations and temperature fluctuations, that may affect motion control of the load, displacement may be controlled with a resolution better than a 100 picometers.

DC voltages applied to a piezoelectric motor in accordance with some embodiments of the present invention generate displacements of the motor's coupling surface that are substantially collinear and are used to move a load along a substantially same single direction. In some embodiments of the present invention, DC voltages applied to a piezoelectric motor are controlled to generate non-collinear displacements of the motor's coupling surface, which may be used to move a load along a first direction and/or along a second orthogonal direction.

It is noted that displacements along a given direction of a coupling surface of a piezoelectric motor operating in a DC mode, in accordance with an embodiment of the present invention, may be used not only to displace a load along the direction. The motor may of course be coupled to a load so that in a DC mode displacements of the motor's coupling surface generate angular displacements of the load about an axis.

There is therefore provided, in accordance with an embodiment of the present invention a piezoelectric motor for moving and positioning a load, the motor comprising: a piezoelectric vibrator having a plurality of electrodes and a coupling surface which is pressed to a load; and a power supply selectively operable to electrify at least one vibrator electrode with time varying voltage to generate vibrations in the coupling surface that step the load to a desired position or to electrify at least one vibrator electrode with DC voltage to displace the coupling surface and move thereby the load to a desired position, which DC voltage the power supply maintains to maintain the load at the desired position.

Optionally, displacements generated by DC voltage applied by the power supply are substantially collinear. Additionally or alternatively, the DC voltage is controllable to generate displacements that are not collinear.

In some embodiments of the present invention, the vibrator is formed in a shape of a rectangular plate having first and second parallel, relatively large face surfaces and long and narrow edge surfaces and wherein the plurality of electrodes comprises at least one electrode on each face surface.

5 Optionally, the at least one electrode on the first face surface comprises four quadrant electrodes each of which covers substantially all of a different quadrant of the face surface. Optionally, the at least one electrode on the second face surface comprises a single electrode that covers substantially all the area of the other face surface.

10 In some embodiments of the present invention, the coupling surface is a surface on a short edge surface of the vibrator.

The power supply optionally electrifies at least one quadrant electrode relative to the single electrode to bend the vibrator in its plane and displace thereby the coupling surface.

15 Alternatively, the power supply optionally electrifies quadrant electrodes along a same long edge surface with a DC voltage and quadrant electrodes along opposite long edges with opposite polarity voltage. Alternatively, the power supply optionally electrifies quadrant electrodes along a same long edge surface with a DC voltage and quadrant electrodes along opposite long edges are floating. Alternatively, the power supply optionally electrifies quadrant electrodes along a same diagonal with a same DC voltage and quadrant electrodes along different diagonals with opposite polarity voltage. Alternatively, the power supply
20 optionally electrifies quadrant electrodes along one diagonal of the first surface with a DC voltage and quadrant electrodes along the other diagonal are floating. Alternatively, the power supply optionally electrifies quadrant electrodes along one diagonal of the first surface with a DC voltage and quadrant electrodes along the other diagonal are grounded. Optionally, the single electrode is grounded.

25 In some embodiments of the present invention, the vibrator is formed in the shape of a rectangular parallelepiped constructed from a plurality of thin rectangular layers of piezoelectric material bonded together, each layer having relatively large face surfaces and long and short edge surfaces, and wherein the plurality of electrodes comprises at least one electrode substantially contiguous with each face surface of the layers.

30 Optionally, the coupling surface is located on a short edge of the vibrator.

Additionally or alternatively, the power supply electrifies at least one configuration of electrodes with DC voltage to bend the vibrator in its plane and displace thereby the coupling surface. In some embodiments of the present invention, the power supply electrifies at least

one configuration of electrodes with DC voltage to bend the vibrator perpendicular to its plane and displace thereby the coupling surface.

In some embodiments of the present invention, DC voltage is controlled to control magnitude of displacement of the coupling surface to resolution equal to or better than a 5
5 nanometers.

In some embodiments of the present invention, DC voltage is controlled to control magnitude of displacement of the coupling surface to resolution equal to or better than a 2 nanometers.

In some embodiments of the present invention, DC voltage is controlled to control
10 magnitude of displacement of the coupling surface to resolution equal to or better than a 1 nanometer.

In some embodiments of the present invention, DC voltage is controlled to control magnitude of displacement of the coupling surface to resolution equal to or better than a 0.1 nanometer.

15 There is further provided, in accordance with an embodiment of the present invention, a piezoelectric actuator for moving and positioning a load, the actuator comprising: a piezoelectric body having a plurality of electrodes and a coupling surface which is pressed to a load to friction couple the body to the load; and a power supply operable to electrify at least one electrode of the plurality of electrodes with DC voltage to displace the coupling surface
20 and drag thereby the load to a desired position, which DC voltage the power supply maintains to maintain the load at the desired position.

Optionally, displacements generated by the DC voltage applied by the power supply are substantially collinear. Additionally or alternatively, the DC voltage is controllable to generate displacements that are not collinear.

25 BRIEF DESCRIPTION OF FIGURES

Non-limiting examples of embodiments of the present invention are described below with reference to figures attached hereto and listed below. In the figures, identical structures, elements or parts that appear in more than one figure are generally labeled with a same numeral in all the figures in which they appear. Dimensions of components and features
30 shown in the figures are chosen for convenience and clarity of presentation and are not necessarily shown to scale.

Figs. 1A-1B schematically show a piezoelectric motor operating in a DC mode to move and accurately position a load at different substantially collinear locations, in accordance with an embodiment of the present invention; and

Figs. 2A-2D schematically show another piezoelectric motor operating in a DC mode to move and accurately position a load at different non-collinear locations, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Figs. 1A-1B schematically show a piezoelectric motor 20 coupled to a load 22 operating in a DC mode to position the load, in accordance with an embodiment of the present invention. Parts and features of piezoelectric motor 20 that are not normally seen in the perspective of Figs. 1A-1B are shown with ghost lines. For convenience of presentation a coordinate system 21 is used to reference position and orientation of features of piezoelectric motor 20 and load 22 and directions germane to discussion of operation of the motor.

Piezoelectric motor 20 is similar in construction to a piezoelectric motor shown in U.S. Patent 5,616,980 referenced above and optionally comprises a relatively thin piezoelectric vibrator 24 formed in the shape of a rectangular plate having large face surfaces 26 and 27. Face surface 26 optionally has four "quadrant" electrodes 31, 32, 33 and 34 mounted thereon, wherein each quadrant electrode covers substantially all of a different quadrant of surface 26. Surface 27 optionally has a single large electrode 36 mounted thereon. A friction nub 38 is optionally mounted on a short edge surface 28 of vibrator 24. Vibrator 24 is resiliently urged towards load 22 using any of various methods and apparatus known in the art so that friction nub 38 presses against load 22. Each electrode 31, 32, 33 and 34 is electrically connected to a power supply 40.

In accordance with an embodiment of the present invention, piezoelectric motor 20 has at least one AC mode of operation and at least one DC mode of operation. In an AC mode of operation, power supply 40 is controlled to electrify an appropriate configuration of electrodes comprising at least one quadrant electrode 31, 32, 33 and 34 relative to large electrode 36 with a time varying, optionally AC voltage to generate vibrations in the vibrator. The vibrations generate vibrations, usually elliptical, in friction nub 38 that step load 22 in either direction along the y-axis as required.

Any of various configurations of AC or time varying voltage known in the art may be used in an AC operation mode of piezoelectric motor 20 to generate appropriate vibratory motion of friction nub 38 to move load 22 as required. By way of example, US Patent

5,616,980 and US Application 09/980,375 describe various AC voltage configurations for generating vibrations in a vibrator similar to vibrator 24 and controlling motion of a load that may be used to generate vibrations in vibrator 24 and control motion of load 22. Fig. 1A schematically shows load 22 optionally after it has been positioned at a desired y-coordinate by piezoelectric motor 20 operating in an AC mode. In Fig. 1A, vibrator 24 has ceased vibrating and no voltage difference is applied between large electrode 36 and any of quadrant electrodes 31, 32, 33 and 34 by power supply 40. As a result, the shape of vibrator 40 is substantially rectangular and does not exhibit any left right asymmetry along the y-axis.

In a DC mode, power supply 40 applies a DC voltage difference between at least one quadrant electrode 31, 32, 33, 34 and large electrode 36 to cause vibrator 24 to bend substantially in its plane and displace friction nub 38 in the positive or negative y direction. The displacement of friction nub 38 displaces load 22. Magnitude and polarity of the DC voltage is determined responsive to the displacement required to position load 22 at the desired position. The voltage is maintained as long as it is required to maintain load 22 at the desired position.

Any of various DC modes of operation of piezoelectric motor 20 may be used, in accordance with an embodiment of the present invention, to displace and position load 22. For example, Fig. 1B schematically shows piezoelectric motor 20 operating in a DC mode, in accordance with an embodiment of the present invention, to displace load 22 by an amount $+\Delta y$ from the load's position shown in Fig. 1A. The displaced position of load 22 in Fig. 1B is shown in dashed lines.

Assume that piezoelectric plate 24 is polarized so that a positive voltage applied to a quadrant electrode 31, 32, 33, or 34 relative to large electrode 36 causes the material between the quadrant electrode and the large electrode to expand. Let DC_i represent an "i-th" DC mode of operation, in accordance with an embodiment of the present invention. Let V_i represent a positive voltage relative to electrode 36 that power supply 40 applies to a quadrant electrode 31, 32, 33 or 34 in mode DC_i which displaces friction nub 38 and thereby load 22 by a distance Δy along the y-axis. Then, by way of example, to displace load 22 by Δy , in accordance with an embodiment of the present invention, voltage may be applied to electrodes 31, 32, 33, 34 and 36 in the exemplary DC_i modes of operation that are listed below. For each exemplary DC_i mode listed, an electrode is electrified at a voltage indicated by an equal sign following the electrode number, the letter F indicates that the electrode is floating and the number 0 indicates that the electrode is grounded.

DC₁: (31,34 = V₁; 32, 33 = -V₁; 36 = 0)

DC₂: (31,34 = V₂; 32,33 = F; 36 = 0)

DC₃: (31,33 = V₃; 32,34 = -V₃; 36=0)

DC₄: (31,33 = V₄; 32,34 = F; 36=0)

5 DC₅: (31,33 = V₅; 32,34 = 0; 36=0).

The preceding list of exemplary DC modes is not exhaustive and other DC modes and variations of the DC modes listed will readily occur to a person of the art. For example, whereas in DC₁, voltage applied to electrodes 32 and 33 is opposite in polarity and equal in magnitude to that applied to electrodes 31 and 34, in some embodiments of the present invention, magnitude of voltage applied to electrodes 32 and 33 is different from that applied
10 to electrodes 31 and 34. Each DC mode is defined with a voltage having a subscript that matches the subscript of the mode to indicate that for a same given displacement, magnitude of voltage applied to electrodes comprised in motor 20 may be different for different DC modes.

15 It is noted that piezoelectric motor 20 is optionally right left symmetric along the y-axis. As a result, a displacement of -Δy may be provided by replacing each voltage used to provide a +Δy displacement by its negative. Alternatively, a voltage configuration used to produce a +Δy displacement may be replaced by its reflection in a plane parallel to the xz-plane and through the center of the motor to provide a -Δy displacement.

20 The inventor has found that for a piezoelectric motor similar to piezoelectric motor 20 operating in a DC_i mode of operation, in accordance with an embodiment of the present invention, displacements Δy can often be controlled to resolution equal to or better than a small number of nanometers. In some embodiments of the present invention resolution is better than 5 nanometers. In some embodiments of the present invention resolution is better
25 than 2 nanometers. In some embodiments of the present invention resolution is better than a nanometer. In some embodiments of the present invention for which displacement of a load is appropriately compensated for environmental disturbances such as vibrations and fluctuations of ambient temperature, displacements Δy are controllable to resolution better than 100 picometers. Whereas for a given DC_i mode of operation, displacement Δy as a function of
30 voltage V_i follows a hysteresis curve, often the hysteresis curve is sufficiently narrow so that for some applications, and in a limited dynamic range, Δy may be considered to be a substantially a linear function of V_i.

By way of numerical example, assume that a piezoelectric motor, in accordance with an embodiment of the present invention, similar to motor 20 comprises a vibrator 24 that is about 30 mm long, 7.5 mm wide, 2 mm, is formed from PZT. The inventor has found that for such a motor operating in DC₄ mode Δy increases or decreases by about 1 nanometer for each 0.8 volt increase or decrease respectively of V_i and that Δy can be controlled to resolution equal to or better than 1 nanometer. Displacement Δy is a substantially linear function of voltage for $|\Delta y| \leq$ about 500 nanometers.

It is noted that whereas in the above example piezoelectric motor 20 comprises a single relatively thin rectangular vibrator 24, piezoelectric motors in accordance with an embodiment of the present invention may comprise vibrators different from vibrator 24. Such vibrators may for example, have shapes and/or electrode configurations different from that shown in Figs. 1A and 1B.

For example, whereas quadrant electrodes 31-34 on face surface 26 of vibrator 24 shown in Figs. 1A and 1B are all of the same size, in some embodiments of the present invention, electrodes on face surface 26 along one long edge of vibrator 24 are larger than electrodes along the other long edge. The difference in electrode size provides greater dynamic range in one direction along the y axis than in the other opposite direction. A piezoelectric vibrator similar to vibrator 24 may also have a number of electrodes on face surface 26 different from four. By way of another example, a piezoelectric motor, in accordance with an embodiment of the present invention, may comprise a multilayer vibrator, such as a multilayer vibrator similar to that shown in US Application 09/980,375. Other vibrators and electrode configurations suitable for the practice of the present invention will readily occur to a person of the art.

Whereas piezoelectric motor 20 displaces a load along a single axis, *i.e.* by way of example, the y-axis in Figs. 1A and 1B, in some embodiments of the present invention a piezoelectric motor operating in a DC mode can displace a load along two orthogonal axes.

Fig. 2A-2C schematically show a piezoelectric motor 50, in accordance with an embodiment of the present invention, having DC modes operable to displace a load along either or both of two orthogonal axes. Piezoelectric motor 50 is, by way of example, a multilayer piezoelectric motor having a construction similar to a multilayer piezoelectric motor described in US Application 09/980,375, and is shown in Figs. 2A-2C coupled to a load 22.

Piezoelectric motor 50 optionally comprises a multilayer vibrator 52 having two thin rectangular piezoelectric layers 54 and 55. Optionally, piezoelectric layers 54 and 55 are mirror images of each other. Four quadrant electrodes 61, 62, 63 and 64 are optionally located on a face surface 60. Four quadrant electrodes 71, 72, 73 and 74, which are optionally mirror
5 images of electrodes 61, 62, 63 and 64 respectively, are optionally located on a face surface 70. A single large "intermediate" electrode 68 is optionally located between layers 54 and 55. A friction nub 56 is located on an edge surface 57. Optionally, piezoelectric layers 54 and 55 are polarized so that a positive voltage applied to any quadrant electrode relative to intermediate electrode 68 causes material between the quadrant electrode and the intermediate
10 electrode to expand. The electrodes on vibrator 52 are connected to a power supply 80.

Piezoelectric motor 50 has AC modes of operation for moving load 22 along the x-axis and/or along the y-axis. For these AC modes of operation power supply 80 electrifies electrodes of vibrator 52 with AC voltage to generate appropriate vibrations in friction nub 56. Any of various different configurations of electrified electrodes on vibrator 52, such as
15 configurations similar to those described in US Application 09/980,375 may be used in an AC mode of piezoelectric motor 50 to generate desired vibrations in friction nub 56. Fig. 2A shows piezoelectric motor 50 after the motor has positioned load 22 at a desired location along the x-axis and y-axis and power supply 80 has removed all voltage differences between electrodes on vibrator 52.

20 Piezoelectric motor 50 has DC modes, in accordance with embodiments of the present invention, for displacing load 22 along the x-axis and along the y-axis as required relative to the position of the load shown in Fig. 2A. Let an "i-th" DC mode of motor 52 that displaces load 22 along the y axis be represented DCy_i and an i-th DC mode that displaces load 22 along the x axis be represented by DCx_i .

25 In a DCy_i mode, mirror image electrodes on face surfaces 60 and 70 are optionally electrified with a same DC voltage relative to intermediate electrode 68, e.g. quadrant electrodes 61 and 71 are electrified to a same voltage relative to electrode 68. In addition, mirror electrode pairs on vibrator 52 are optionally electrified with DC voltage in configurations that are homologous to those of exemplary DC modes DC_1 - DC_5 of motor 20
30 shown in Figs. 1A and 1B to displace load 22 along the y-axis.

For example, quadrant electrodes on vibrator 52 may be electrified in a DC mode "DCy₃" homologous to DC mode DC_3 of motor 20 noted above to move load 22 a distance Δy . In DCy_3 therefore, intermediate electrode 68 would be grounded and quadrant electrode

mirror image pairs would be electrified as follows: (61 & 71) and (63 & 73) = V'_3 ; (62 & 72) and (64 & 74) = $-V'_3$. Voltage $\pm V'_3$ applied to the electrode pairs is primed to indicate that for a same displacement Δy , voltage applied to motor 50 in mode DCy₃ is not necessarily the same as voltage V_3 applied to quadrant electrodes in mode DC₃ of motor 20. Fig. 2B
5 schematically shows piezoelectric motor 50 optionally operating in a DC mode, optionally DCy₃, to displace load 22 by a distance Δy .

To displace load 22 along the x-axis, motor 50 may be operated, in an exemplary DCx_i mode arbitrarily referred to as DCx₁, for which intermediate electrode 68 is grounded, quadrant electrodes 61, 62, 63 and 64 are electrified with a same voltage "V" and quadrant
10 electrodes 71, 72, 73 and 74 are electrified to same voltage -V. If V is positive, the applied voltages will cause vibrator 52 to bend in the negative x direction and if V is negative the applied voltages will cause vibrator 52 to bend in the positive x direction. Friction nub 56 and load 22 will move accordingly.

By way of another example of a DCx_i mode, electrodes 71, 72, 73 and 74 are floating, intermediate electrode 68 is grounded and electrodes 61, 62, 63 and 64 are electrified with a
15 same positive or negative voltage to displace load 22 in the negative or positive x direction respectively. Fig. 2C schematically shows motor 50 operating in a DCx_i mode to displace load 22 by a distance Δx in the positive x direction.

DCx_i and DCy_i modes respectively displace load 22 in the x and y directions. In accordance with an embodiment of the present invention, a DCx_i mode and a DCy_j mode are
20 combined to provide a displacement of load 22 having a component along the x-axis and a component along the y-axis. DCx_i and DCy_i modes are combined by superposing their respective voltage configurations. For example, to displace load 22 along both the positive x direction and the positive y direction, mode DCx₁ may be combined with mode DCy₃.
25 Differences in voltages between quadrant electrodes provided by DCy₃ would be superposed on biases of quadrant electrodes provided by DCx₁. Fig. 2D schematically shows piezoelectric motor 50 operating in a combined DCx_i and DCy_i mode to displace load 22 by a displacement Δs having components Δx and Δy .

For some applications an actuator may be required to displace a load by relatively
30 small distances that are controlled to relatively high resolution to position the load. For such applications, an actuator, in accordance with an embodiment of the present innovation, may be advantageous. Such an actuator comprises a piezoelectric body having a plurality of electrodes and a coupling surface which is pressed to a load to friction couple the piezoelectric body to

the load and a power supply that operates the actuator in only a DC mode or modes. In a DC mode, the power supply electrifies electrodes of the piezoelectric body with DC voltage to distort the shape of the piezoelectric body, e.g. bend or elongate the body. As the piezoelectric body is distorted, the coupling surface moves and drags the load to which it is pressed along with it.

In some embodiments of the present invention, the actuator comprises a piezoelectric body having a shape similar to that of vibrator 24 comprised in motor 20 shown in Figs. 1A and 1B and operates to displace a load along a single direction. In some embodiments of the present invention, the actuator comprises a piezoelectric body having a shape similar to that of vibrator 52 comprised in motor 50 (Figs. 2A-2D) and operates to displace a load along a first direction and/or along a second direction orthogonal to the first direction. In the description and claims of the present application, each of the verbs, "comprise" "include" and "have", and conjugates thereof, are used to indicate that the object or objects of the verb are not necessarily an exhaustive listing of members, components, elements or parts of the subject or subjects of the verb.

The present invention has been described using detailed descriptions of embodiments thereof that are provided by way of example and are not intended to limit the scope of the invention. The described embodiments comprise different features, not all of which are required in all embodiments of the invention. Some embodiments of the present invention utilize only some of the features or possible combinations of the features. Variations of embodiments of the present invention that are described and embodiments of the present invention comprising different combinations of features noted in the described embodiments will occur to persons of the art. The scope of the invention is limited only by the following claims.

CLAIMS

1. A piezoelectric motor for moving and positioning a load, the motor comprising:
a piezoelectric vibrator having a plurality of electrodes and a coupling surface which is pressed to a load; and
5 a power supply selectively operable to electrify at least one vibrator electrode with time varying voltage to generate vibrations in the coupling surface that step the load to a desired position or to electrify at least one vibrator electrode with DC voltage to displace the coupling surface and move thereby the load to a desired position, which DC voltage the power supply maintains to maintain the load at the desired position.
10
2. A piezoelectric motor according to claim 1 wherein displacements generated by DC voltage applied by the power supply are substantially collinear.
3. A piezoelectric motor according to claim 1 or claim 2 wherein the DC voltage is
15 controllable to generate displacements that are not collinear.
4. A piezoelectric motor according to any of the preceding claims wherein the vibrator is formed in a shape of a rectangular plate having first and second parallel, relatively large face surfaces and long and narrow edge surfaces and wherein the plurality of electrodes comprises
20 at least one electrode on each face surface.
5. A piezoelectric motor according to claim 4 wherein the at least one electrode on the first face surface comprises four quadrant electrodes each of which covers substantially all of a different quadrant of the face surface.
25
6. A piezoelectric motor according to claim 5 wherein the at least one electrode on the second face surface comprises a single electrode that covers substantially all the area of the second face surface.
- 30 7. A piezoelectric motor according to 6 wherein the single electrode is grounded.

8. A piezoelectric motor according to any of claims 4-7 wherein the coupling surface is a surface on a short edge surface of the vibrator.
9. A piezoelectric motor according to any of claims 4-8 wherein the power supply
5 electrifies at least one quadrant electrode relative to the single electrode to bend the vibrator in its plane and displace thereby the coupling surface.
10. A piezoelectric motor according to any of claim 4-8 wherein the power supply
10 electrifies quadrant electrodes along a same long edge surface with a DC voltage and quadrant electrodes along opposite long edges with opposite polarity voltage.
11. A piezoelectric motor according to any of claims 4-9 wherein the power supply
electrifies quadrant electrodes along a same long edge surface with a DC voltage and quadrant
electrodes along opposite long edges are floating.
- 15 12. A piezoelectric motor according to any of claims 4-11 wherein the power supply
electrifies quadrant electrodes along a same diagonal with a same DC voltage and quadrant
electrodes along different diagonals with opposite polarity voltage.
- 20 13. A piezoelectric motor according to any of claims 4-12 wherein the power supply
electrifies quadrant electrodes along one diagonal of the first surface with a DC voltage and
quadrant electrodes along the other diagonal are floating.
14. A piezoelectric motor according to any of claims 4-13 wherein the power supply
25 electrifies quadrant electrodes along one diagonal of the first surface with a DC voltage and
quadrant electrodes along the other diagonal are grounded.
15. A piezoelectric motor according to any of claims 1-3 wherein the vibrator is formed
the shape of a rectangular parallelepiped constructed from a plurality of thin rectangular layers
30 of piezoelectric material bonded together, each layer having relatively large face surfaces and
long and short edge surfaces, and wherein the plurality of electrodes comprises at least one
electrode substantially contiguous with each face surface of the layers.

16. A piezoelectric motor according to claim 15 wherein the coupling surface is located on a short edge of the vibrator.
17. A piezoelectric motor according to claim 16 wherein the power supply electrifies at least one configuration of electrodes with DC voltage to bend the vibrator in the plane of the face surfaces and displace thereby the coupling surface.
18. A piezoelectric motor according to claim 16 or claim 17 wherein the power supply electrifies at least one configuration of electrodes with DC voltage to bend the vibrator perpendicular to the plane of the face surfaces and displace thereby the coupling surface.
19. A piezoelectric motor according to any of the preceding claims wherein DC voltage is controlled to control magnitude of displacement of the coupling surface to resolution equal to or better than a 5 nanometers.
20. A piezoelectric motor according to any of the preceding claims wherein DC voltage is controlled to control magnitude of displacement of the coupling surface to resolution equal to or better than a 2 nanometers.
21. A piezoelectric motor according to any of the preceding claims wherein DC voltage is controlled to control magnitude of displacement of the coupling surface to resolution equal to or better than a 1 nanometer.
22. A piezoelectric motor according to any of the preceding claims wherein DC voltage is controlled to control magnitude of displacement of the coupling surface to resolution equal to or better than a 0.1 nanometer.
23. A piezoelectric actuator for moving and positioning a load, the actuator comprising:
a piezoelectric body having a plurality of electrodes and a coupling surface which is pressed to a load to friction couple the body to the load; and
a power supply operable to electrify at least one electrode of the plurality of electrodes with DC voltage to displace the coupling surface and drag thereby the load to a desired

position, which DC voltage the power supply maintains to maintain the load at the desired position.

24. A piezoelectric actuator according to claim 23 wherein displacements generated by the
5 DC voltage applied by the power supply are substantially collinear.

25. A piezoelectric actuator according to claim 23 or claim 24 wherein the DC voltage is controllable to generate displacements that are not collinear.

1/6

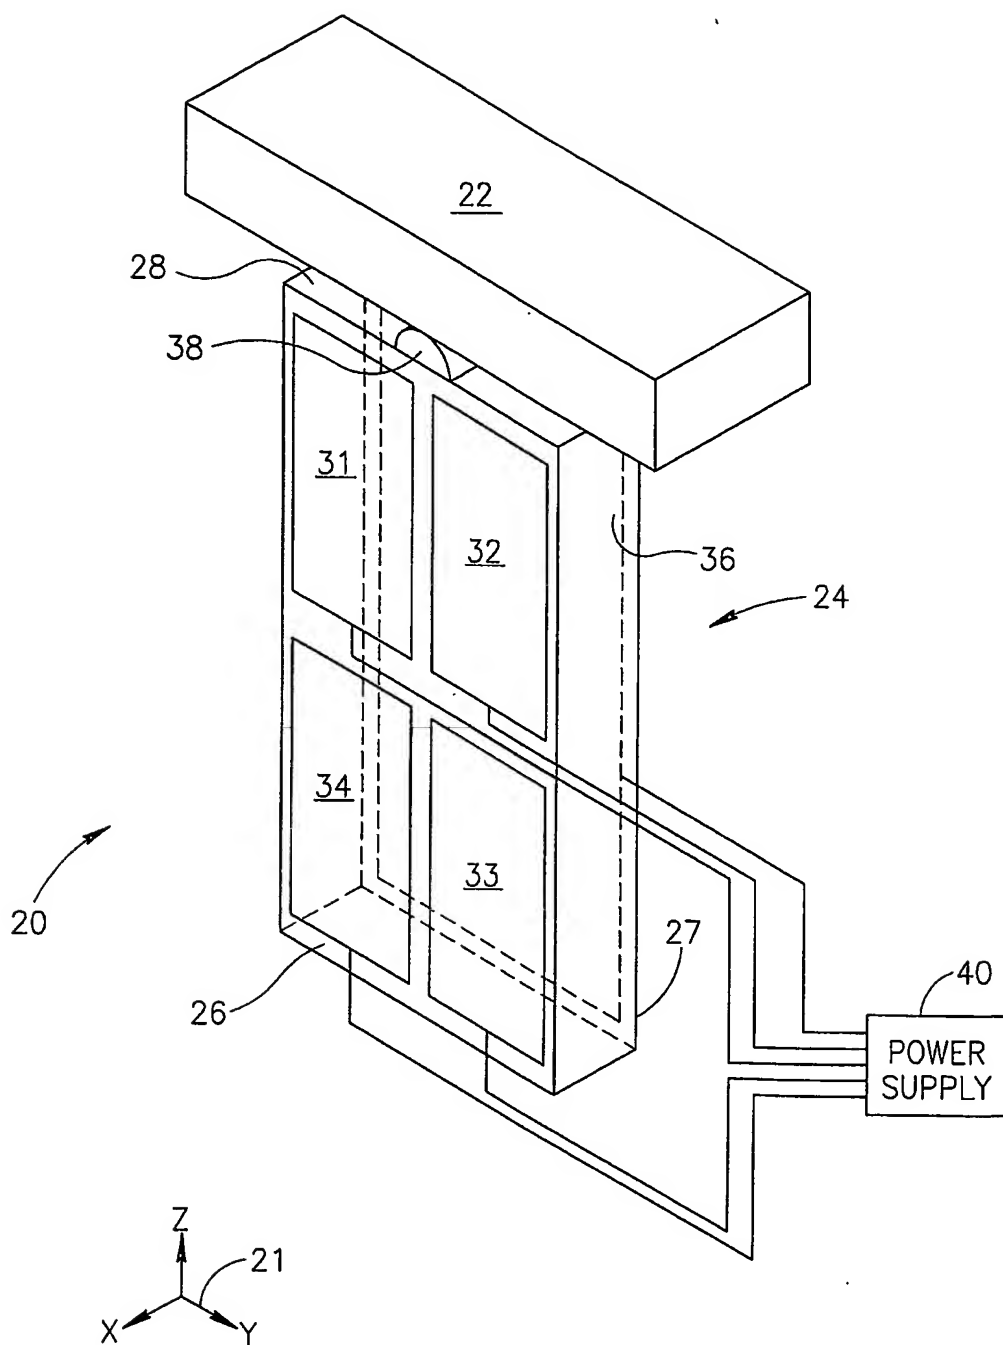


FIG. 1A

2/6


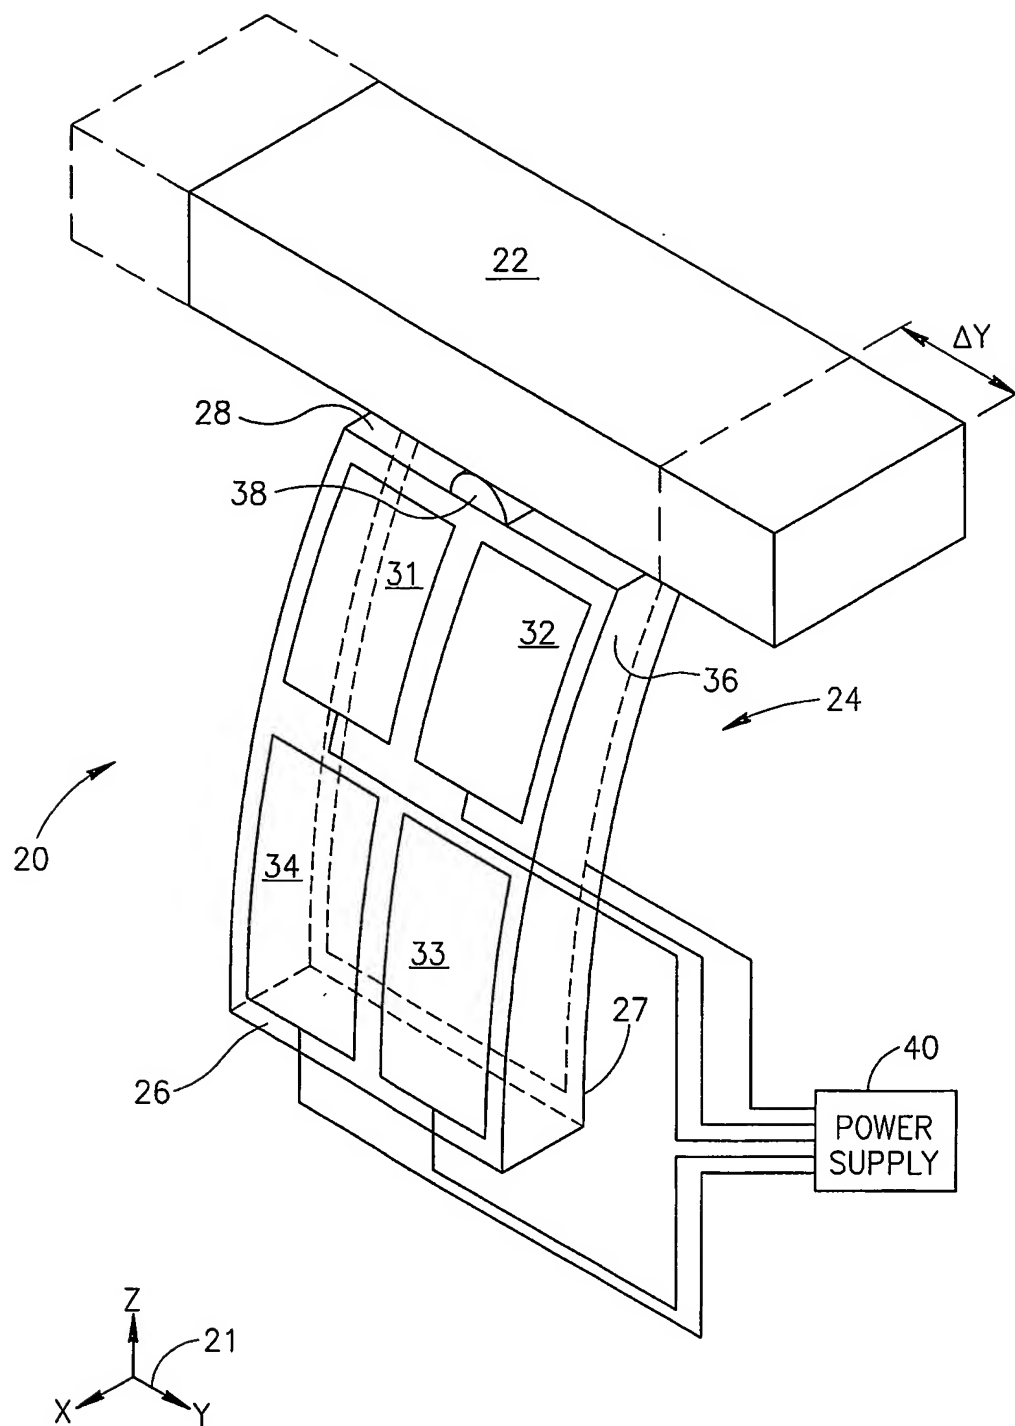


FIG.1B

3/6

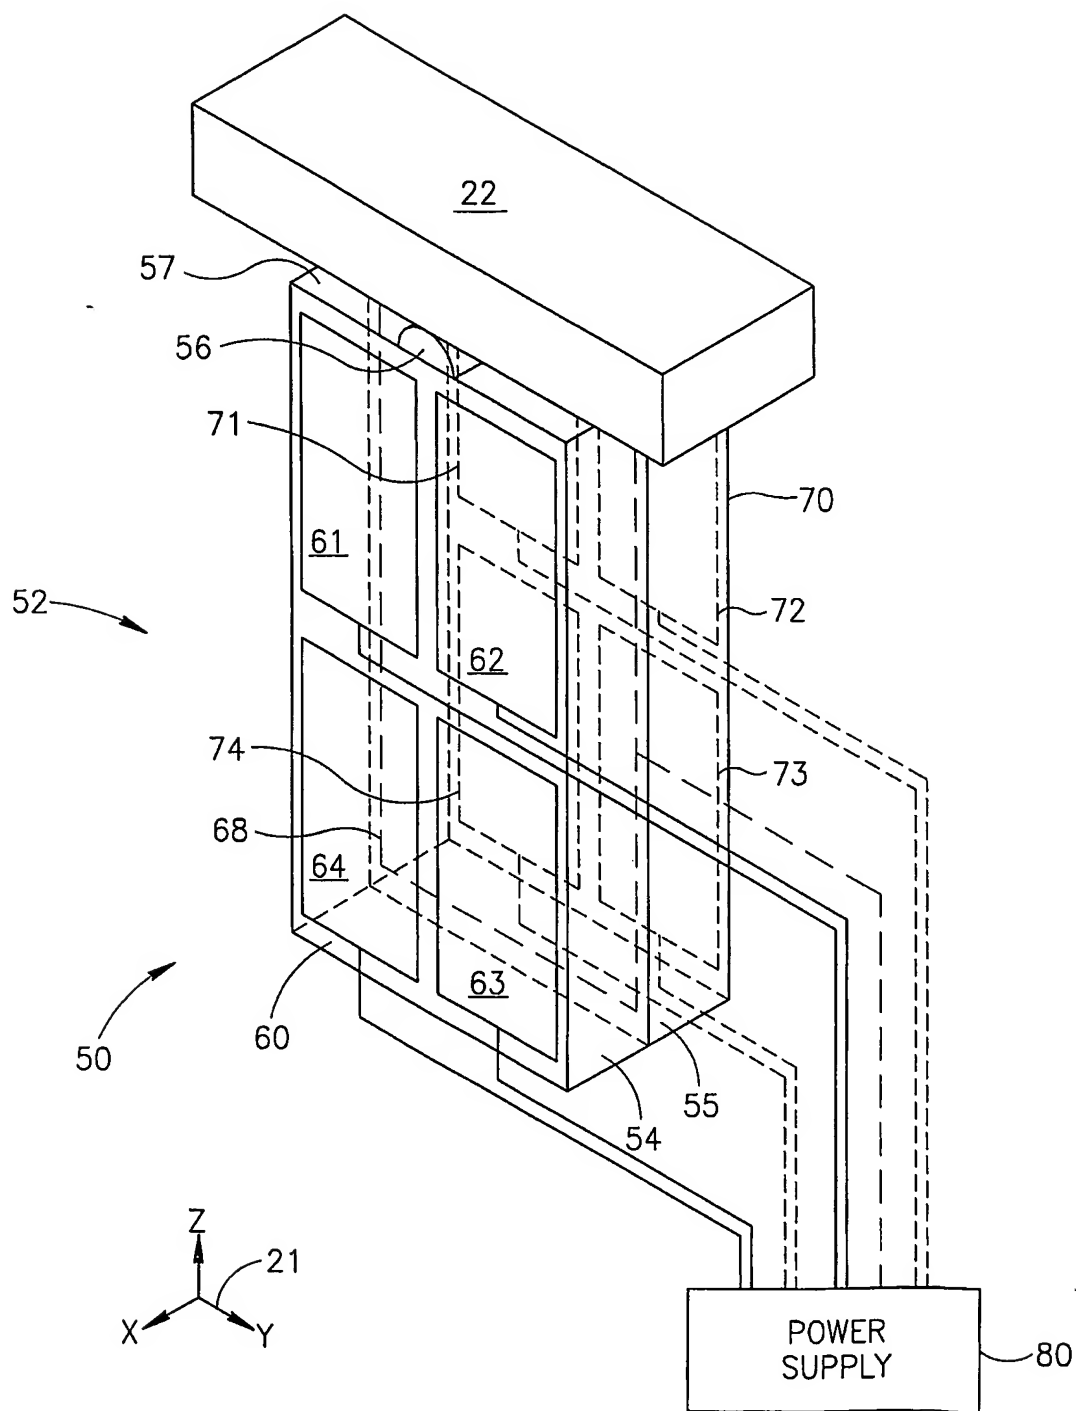

4/6



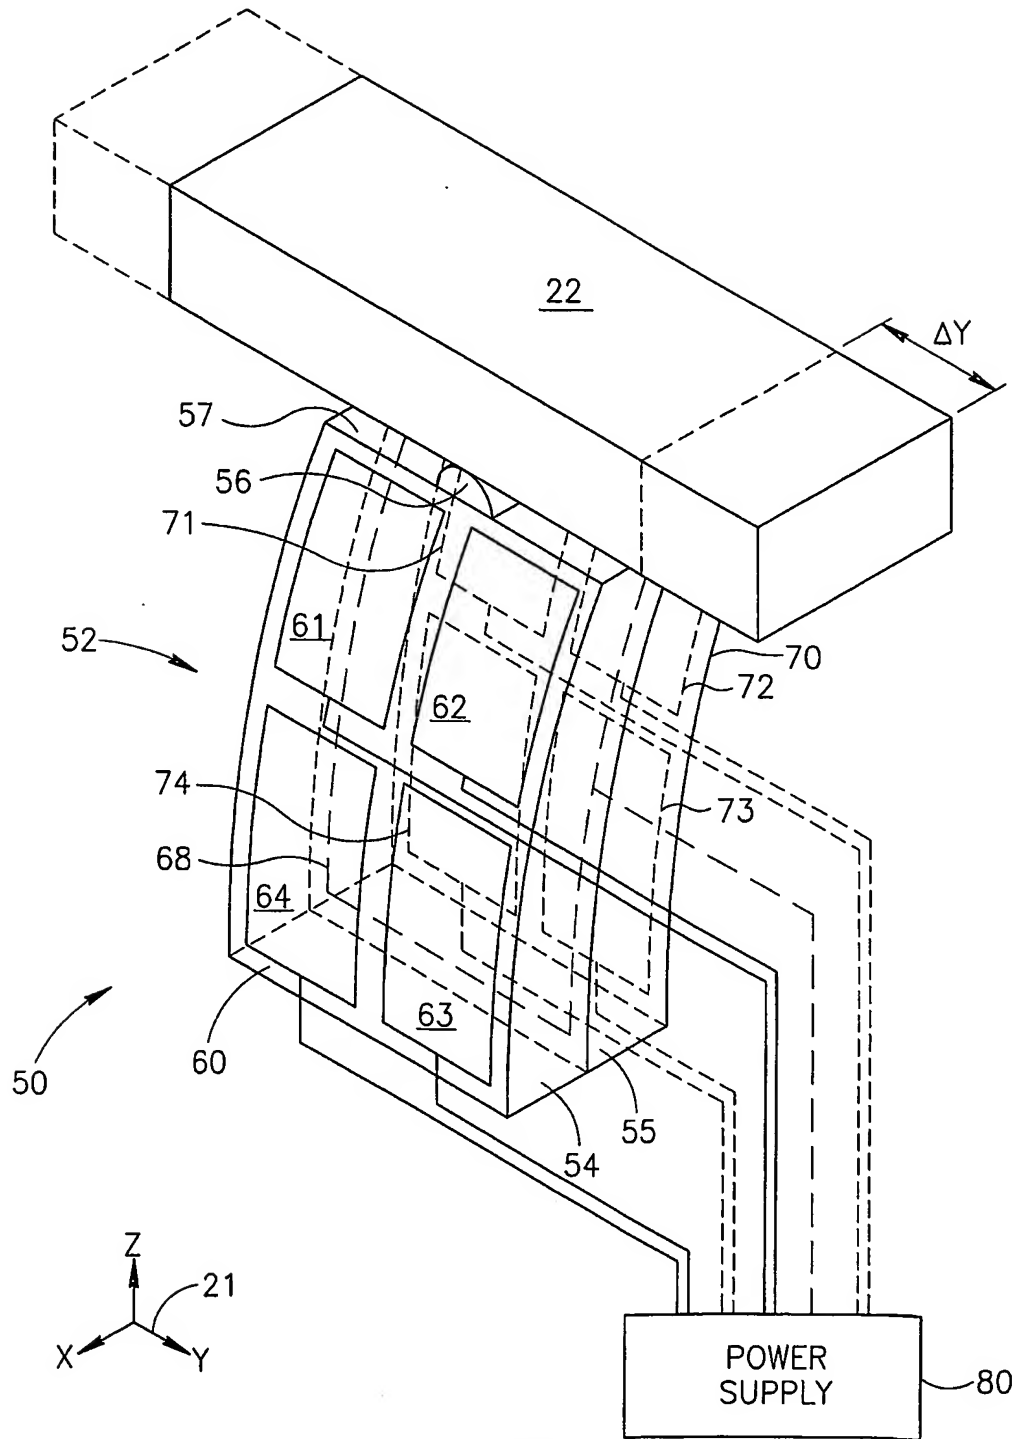


FIG.2B

5/6

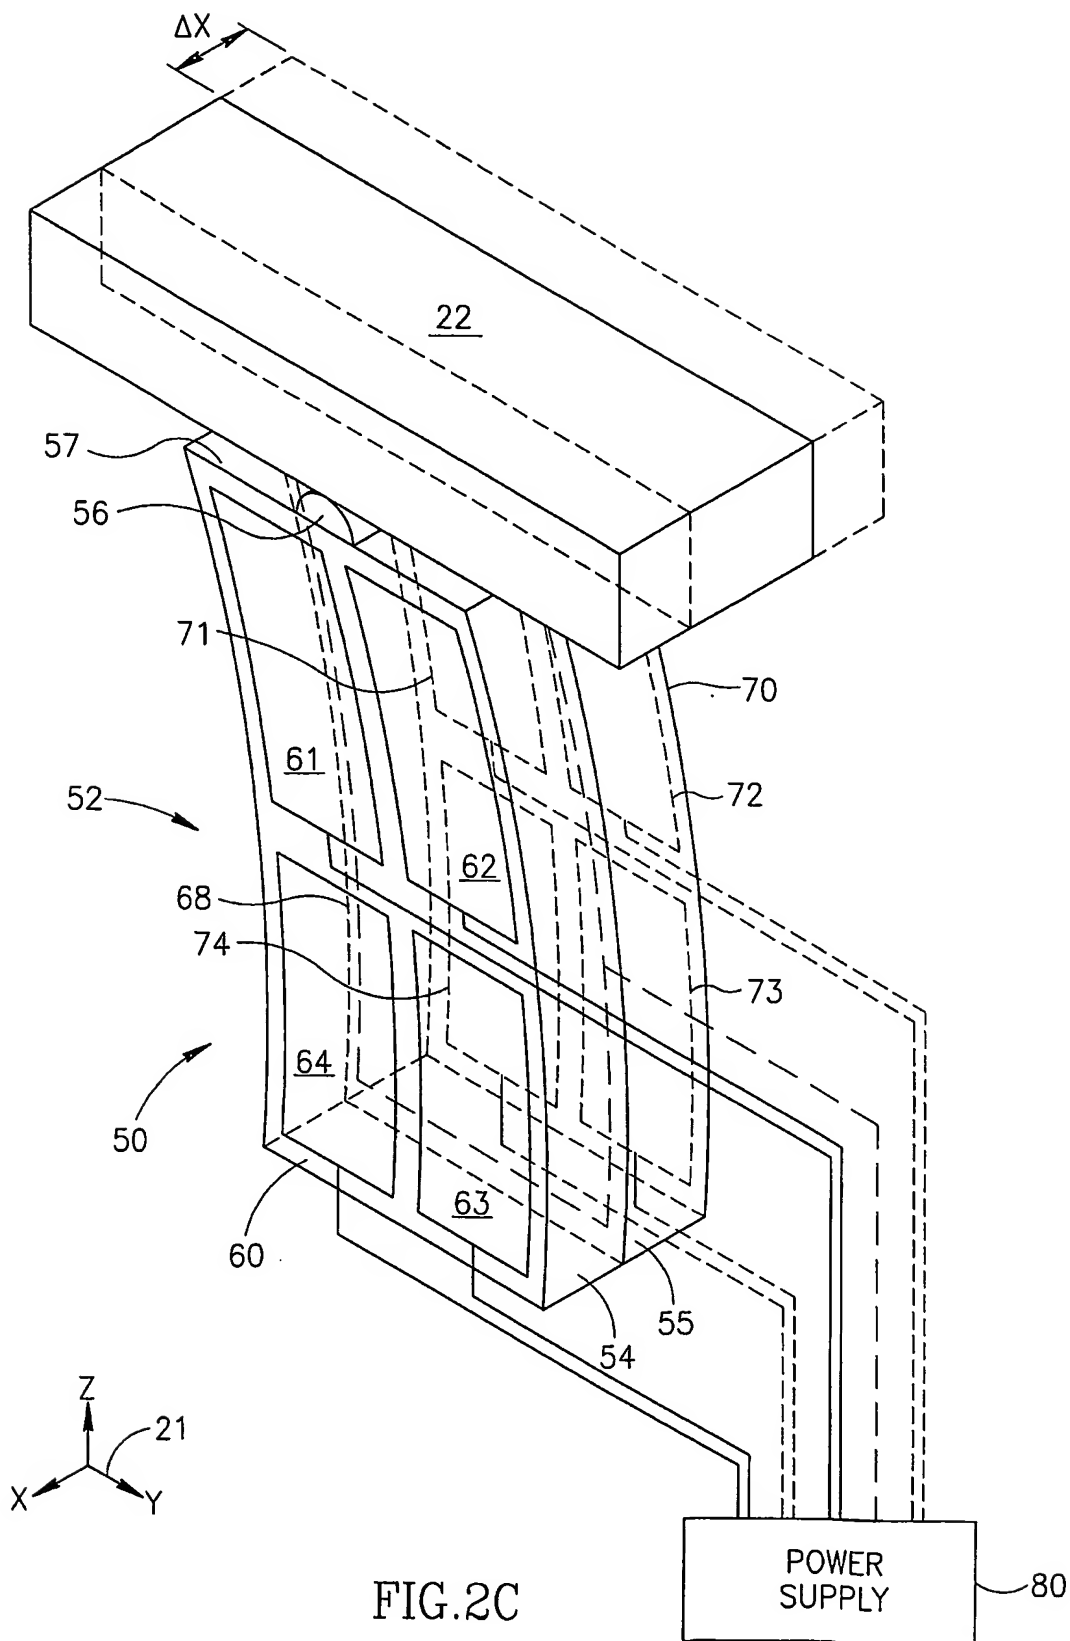

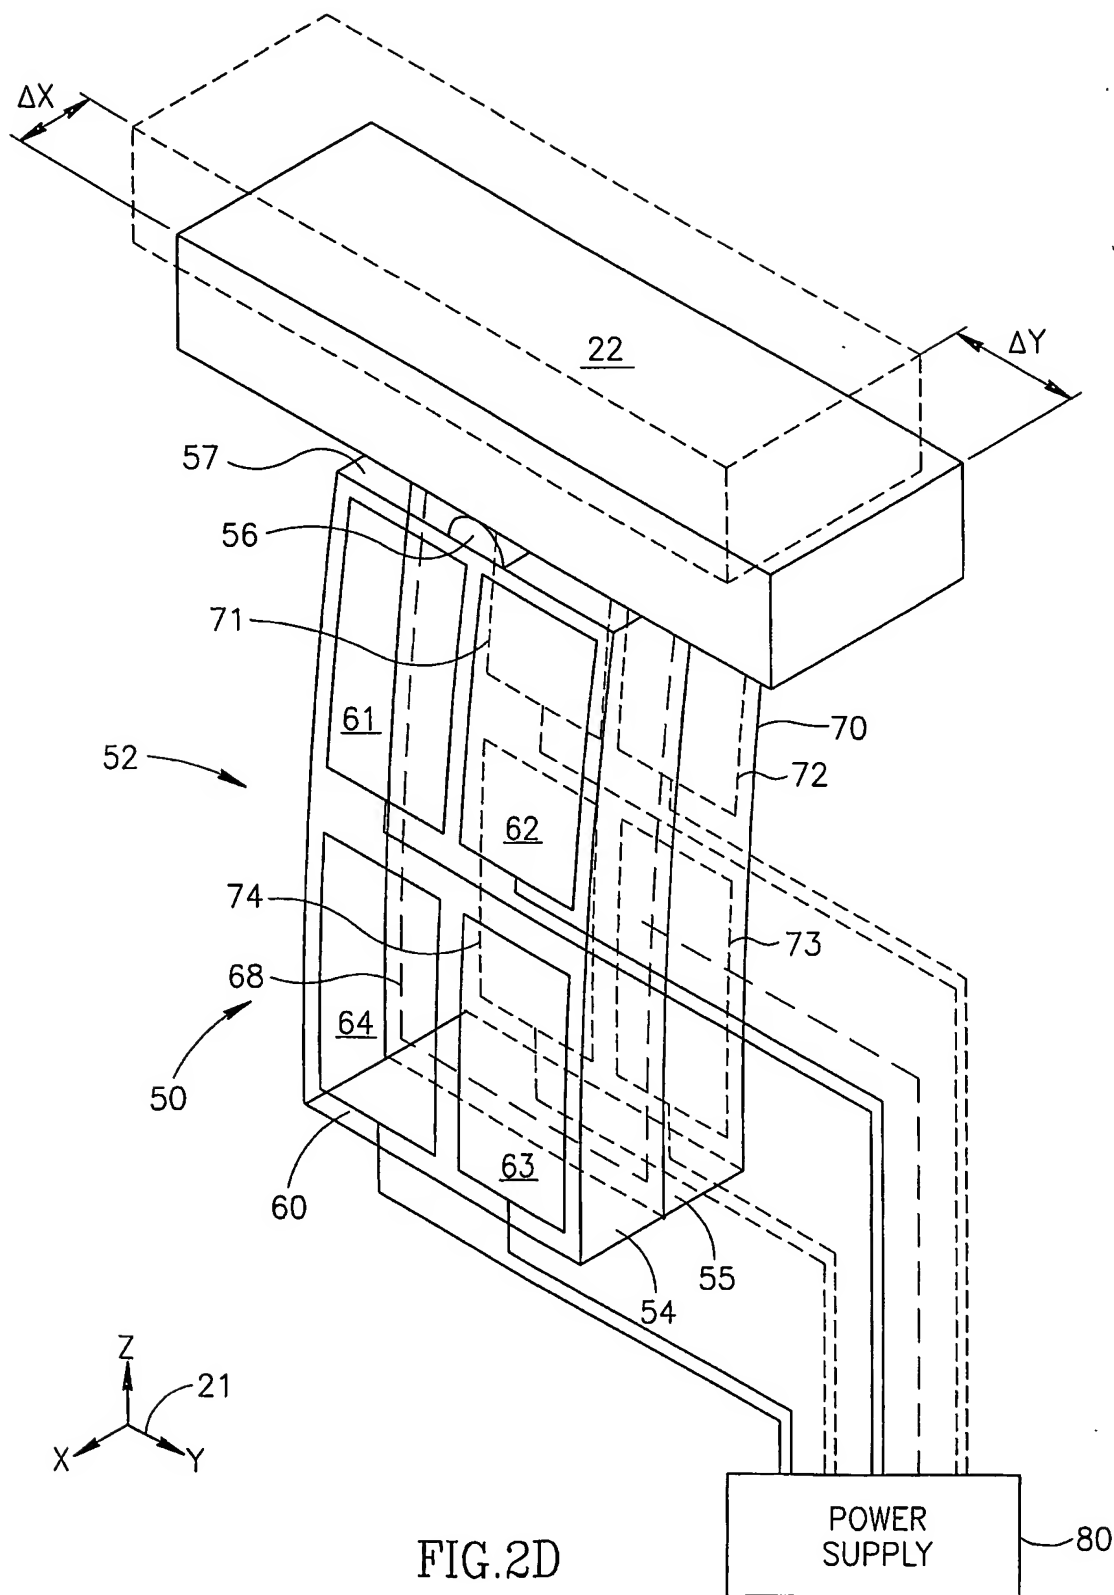

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/012279 A3(51) International Patent Classification⁷: H01L 41/09(21) International Application Number:
PCT/IL2003/000603

(22) International Filing Date: 23 July 2003 (23.07.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
10/206,717 25 July 2002 (25.07.2002) US(71) Applicant (for all designated States except US):
NANOMOTION LTD. [IL/IL]; P.O. Box 223, 20692
Yokneam (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): GANOR, Ze'ev
[IL/IL]; 13 Ben Shalom Street, 46408 Herzlia (IL).(74) Agents: FENSTER, Paul et al.; Fenster & Company,
Intellectual Property 2002 Ltd., P.O. Box 10256, 49002
Petach Tikva (IL).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HIGH RESOLUTION PIEZOELECTRIC MOTOR

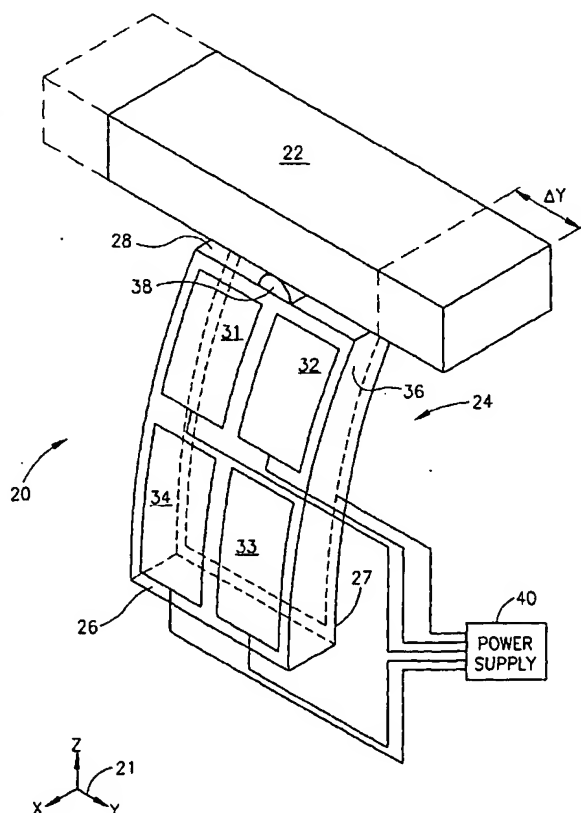

(57) Abstract: A piezoelectric motor (20) for moving and positioning a load (22), the motor comprising: a piezoelectric vibrator (24) having a plurality of electrodes (31-34, 36) and a coupling surface which is pressed to a load; and a power supply (40) selectively operable to electrify at least one vibrator electrode with time varying voltage to generate vibrations in the coupling surface that step the load to a desired position or to electrify at least one vibrator electrode with DC voltage to displace the coupling surface and move thereby the load to a desired position, which DC voltage the power supply maintains to maintain the load at the desired position.



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the International search report:
18 March 2004

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/IL 03/00603

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01L41/09

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| X | MORI K ET AL: "Ultrasonic linear motor for a high precision X-Y stage" IEEE 1989 ULTRASONICS SYMPOSIUM PROCEEDINGS, MONTREAL, QUE., CANADA, 3-6 OCT. 1989, 3 October 1989 (1989-10-03), pages 657-660, XP010090704 New York, USA | 1-3, 23-25 |
| Y | the whole document | 4-22 |
| X | EP 0 313 072 A (HITACHI LTD) 26 April 1989 (1989-04-26) column 5, line 51 -column 9, line 58 | 1-3, 23-25 |
| Y | figures 3,14,15 | 4-22 |
| | --- -/-- | |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

19 January 2004

Date of mailing of the international search report

23/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Meul, H

INTERNATIONAL SEARCH REPORT

Int'l Application No
PCT/IL 03/00603

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| Y | EP 0 755 054 A (NANOMOTION LTD) 22 January 1997 (1997-01-22) cited in the application column 1, line 10-24 column 14, line 6-22 column 16, line 22 -column 18, line 47 figures 3,17 | 4-14, 19-22 |
| Y | WO 00 74153 A (RAFAELI IZHAK ;SHIV LIOR (IL); NANOMOTION LTD (IL)) 7 December 2000 (2000-12-07) page 1, line 3 -page 3, line 15 page 12, line 12 -page 21, line 9 page 23, line 15-31 figures 1A,3,6 | 15-18 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int'l Application No
PCT/IL 03/00603

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| EP 0313072 | A | 26-04-1989 | JP 1110446 A | 27-04-1989 |
| | | | JP 1122375 A | 15-05-1989 |
| | | | JP 2001758 C | 20-12-1995 |
| | | | JP 7032610 B | 10-04-1995 |
| | | | DE 3880781 D1 | 09-06-1993 |
| | | | DE 3880781 T2 | 21-10-1993 |
| | | | EP 0313072 A1 | 26-04-1989 |
| | | | US 4997177 A | 05-03-1991 |
| EP 0755054 | A | 22-01-1997 | EP 0755054 A2 | 22-01-1997 |
| | | | JP 9037575 A | 07-02-1997 |
| | | | US 5714833 A | 03-02-1998 |
| WO 0074153 | A | 07-12-2000 | WO 0074153 A1 | 07-12-2000 |
| | | | AU 4056799 A | 18-12-2000 |
| | | | EP 1186063 A1 | 13-03-2002 |
| | | | JP 2003501988 T | 14-01-2003 |